

27 26

34 35

(WEST 2641.98' rec.)

1/4 SECTION CORNER  
Fd. G.L.O. Brass Cap on a  
1" Iron Pipe, 18" above  
ground in a rock mound,  
Brass Cap s 26  
marked: s 35  
1933  
Set 5 1/2' Steel Guard Post

N89°59'14"E

1321.20'

26 25

SECTION CORNER  
Fd. G.L.O. Brass Cap and 2" Iron Pipe  
12" above the ground in a rock mound  
with a steel guard post beside it,  
Brass Cap marked:  
T.20N. R.53E  
s 26 | s 25  
s 35 | s 36

1321.20'

35 36

(N 0°01'W 2640' rec.)

2639.48'

1319.74'

N89°59'18"E

1321.27'

Set 1/2 Steel Post with R.L.S. tag 4238  
12" above the ground

N89°59'18"E

1321.27'

Set 1/2 Steel Post with R.L.S. tag 4238  
27" above the ground.

N00°00'58"W

1319.74'

5279.92' meas.

N00°01'09"W

1319.77'

SE 1/4 NE 1/4  
(40.03 Acres)

1319.80'

N00°01'20"W

1319.80'

2639.60'

N89°59'23"E

5284.05' meas.

1321.34'

1321.34'

1/4 SECTION CORNER  
Fd. G.L.O. Brass Cap on a 1"  
Iron Pipe 24" above ground  
in a rock mound, Brass Cap  
marked: 1/4  
s 34 | s 35  
1933

2641.37'

Set 1/2 Steel Post with R.L.S. tag 4238  
18" above ground.

CENTER OF SECTION

Set 3" Dia. Brass Cap on 2" Iron Pipe  
24" long, 12" above ground, in 2" high  
by 24" dia. rock mound, brass cap marked:

C 1/4  
s 35  
T.20N. R.53E  
1978  
RLS 4238

Set 5 1/2' Steel Guard Post  
2' East

N0°00'58"W

2640.44'

(N 0°01'W 2640' rec.)  
2639.94' meas.  
N0°00'19"E

1/4 SECTION CORNER  
Fd. G.L.O. Brass Cap on a  
1" Iron Pipe, 20"  
above ground in a rock  
mound, Brass Cap marked:  
1/4  
s 35 | s 36  
1933  
Set 5 1/2' Steel Guard Post


SURVEYOR'S CERTIFICATE

I, Michael W. Lattin, Registered Land Surveyor No. 4238  
State of Nevada do hereby certify that this is a true and accurate  
map of land surveyed under my supervision and direction and  
completed on the 20th day of October, 1978 and that this Survey  
is fully and correctly shown thereon.

*Michael W. Lattin*  
10/20/78

LEGEND

- ◆ Found Section Corner
- ◆ Found 1/4 Corner
- ◇ Set Center of Section
- ( rec ) Refers to bearing and/or distance  
from approved GLO Township plat.

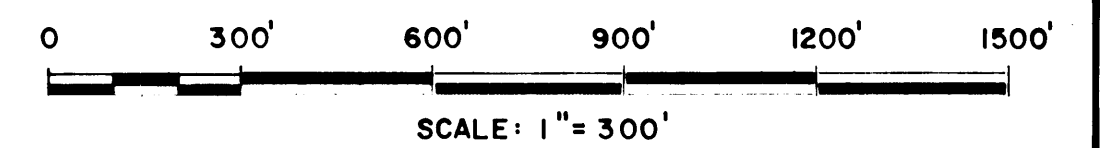

34 35

WEST (BASIS OF BEARINGS)  
(WEST 2640' rec. BASIS OF BEARINGS)

(2640') 2642.34' meas.

T.20N. R.53E.

(WEST 2640' rec.)

35 36

T.19N. R.53E.

SECTION CORNER  
Fd. G.L.O. Brass Cap on a  
2" Iron Pipe, in a  
rock mound with a steel  
guard post beside it,  
Brass Cap T.20N. R.53E  
marked: s 34 | s 35  
T.19N  
1927

BASIS OF BEARINGS

The South line of the SW of Section 35, T.20 N.,  
R. 53 E., M.D.M. as being West as stated on official  
plat of said township approved April 17, 1935.

1/4 SECTION CORNER  
Fd. G.L.O. Brass Cap on a  
1" Iron Pipe, 20" above  
ground in a rock mound,  
Brass Cap s 35  
marked: 1927  
Set 5 1/2' Steel Guard Post

Filed  
AT THE REQUEST OF *Thos. C. JOHNSON*  
on *NOV 29, 1978*, at *45* min. past *1 P.M.* in  
Burke County, Nevada. *Willis A. DePaoli* Recorder  
Fee \$ *40.00*

NO.	BY	DATE	DESCRIPTION	CHK'D	APP'D
REVISIONS					
DRAWN BY W.S.					
APPROVED BY					
JOB NO. 432-011			DATE OCT. 1978		

**RECORD OF SURVEY**  
FOR  
**EUREKA COUNTY COMMISSIONERS**  
SECTION 35, T.20N., R.53E., M.D.M.  
EUREKA COUNTY, NEVADA

**CHILTON ENGINEERING** 78026 0  
421 COURT STREET ELKO, NEVADA